

Carbon Canisters - Carbon Cylindrical Filters

Introduction

The **AAC CF** range of cylindrical filters is a new addition to the long established and highly successful range of activated carbon filter products from **AAC Eurovent**. These filters are made of galvanised mild steel and are filled with 3mm virgin carbon pellets. The cylinders are designed to provide the maximum filtration potential. Manufactured to the highest quality and made to fit most type of extractor fans and mounting frames, these filters give excellent airflows and odour control. The filters incorporate a removable flange design, which permits easy media replacement and their dual use as mountable filtration cylinders.

Typical Applications

- Adsorbing odours such as cooking, sewage waste and animal odours.
- General atmospheric air purification for offices/airports
- Solvents and diesel exhaust odour adsorption.
- Odour control for hydroponics gardening

The AAC CF Range Of Filters Are Available In A Variety Of Sizes:

Model no.	Maximum Volume Flow Rate (cubic m/hr)	Length (mm)	Outer Diameter (mm)	Inner Diameter (mm)	Spigot connection size - when fitted (mm)
AAC CF100	160	450	143	93	100
AAC CF125	240	450	180	143	125
AAC CF150	420	450	255	150	150
AAC CF200	600	500	300	200	200
AAC CF200A	760	750	300	200	200



AAC CF - Carbon Cylindrical Filters

Features & Benefits


- Lightweight and durable.
- Refillable Filters.
- Dual purpose design.
- Most competitive pricing.
- Small size and reduced weight for easy handling and set up.
- Optional pre-filter sleeve can be supplied.

Address: AAC Eurovent Ltd, AAC House, Unit K Maybrook Industrial Estate, Maybrook Road, Brownhills, West Midlands WS8 7DG. UK.

Tel: 08444 77 4884 **Fax:** 08444 77 4797 **International Callers Tel:** +44 (0) 1543 379823

Email: sales@aaceurovent.co.uk **Website:** www.aaceurovent.co.uk

Complete In-Line Cylinder Filter For Ductwork Connection At Both Ends

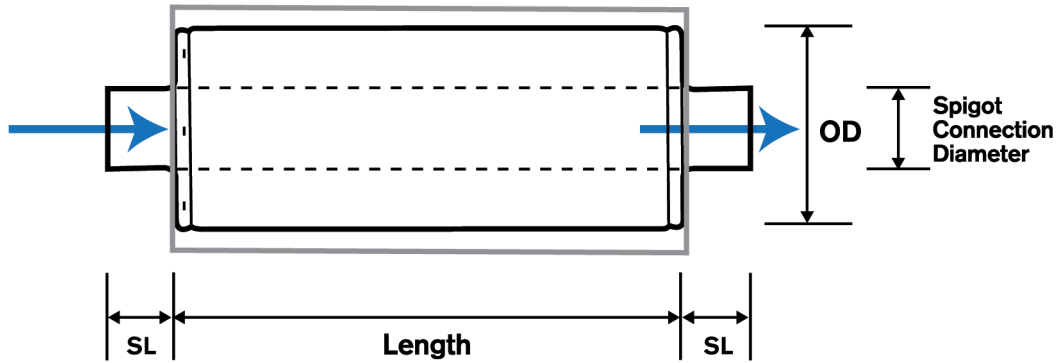

Model no.	Maximum Volume Flow Rate (cubic m/hr)	Length (mm)	Outer Diameter (mm)	Spigot Connection Diameter OD (mm)	SL
AAC ILCF100	160	475	180	98	50
AAC ILCF125	240	475	255	148	50
AAC ILCF150	420	475	300	148	50
AAC ILCF200	600	525	375	198	50
AAC ILCF200A	760	775	375	198	50

The in-line cylinders enable the cylindrical filters to be installed into in-line ductwork. Enabling a streamlined installation for a cylindrical carbon filter to be installed.

The upper cylinder can be removed from its outer casing to enable media replacement to be carried out by removal of self-tapping screws.

The outer cylinder casings are manufactured in either galvanised mild steel, 304/316 stainless steel or powder coated mild steel as required.

Address: AAC Eurovent Ltd, AAC House, Unit K Maybrook Industrial Estate, Maybrook Road, Brownhills, West Midlands WS8 7DG. UK.
Tel: 08444 77 4884 **Fax:** 08444 77 4797 **International Callers Tel:** +44 (0) 1543 379823
Email: sales@aaceurovent.co.uk **Website:** www.aaceurovent.co.uk