

AAC CF range - Carbon Canisters


The AAC CF range of Carbon Canisters is designed to offer maximum Filtration potential. Manufactured in galvanised mild steel and filled with 3mm virgin Activated Carbon, these high quality and robust Filters offer excellent Airflow and Odour Control. The Filters incorporate a removable flange design to permit easy Media replacement and their dual use as mountable Filtration cylinders.

Features & Benefits:

- Refillable Filters
- Dual-purpose design
- Compleitive price
- Durable, compact & lightweight for ease of handling & set-up
- Optional Pre-Filter available

Typical Applications:

- Adsorbing Cooking, Sewage Waste & Animal Odour
- General Air Purification for Offices & Airports
- Solvent & Diesel Exhaust Odour Adsorption
- Odour Control for Hydroponic Gardening

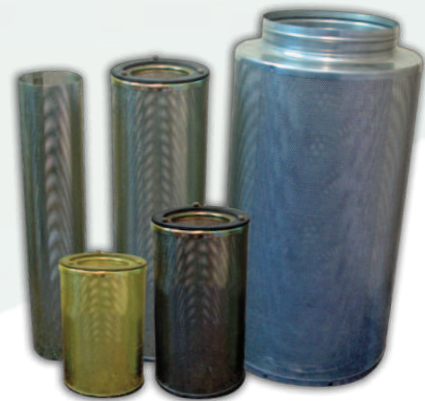

AAC CF range of Carbon Canisters


AAC CF range of Carbon Canisters:

| Model No. | Maximum Volume Flow Rate (cubic m/hr) | Length (mm) | Outer Diameter (mm) | Inner Diameter (mm) | Spigot Connection Size - When Fitted (mm) |
|-------------|---------------------------------------|-------------|---------------------|---------------------|---|
| AAC CF 100 | 160 | 450 | 143 | 93 | 100 |
| AAC CF 125 | 240 | 450 | 180 | 143 | 125 |
| AAC CF 150 | 420 | 450 | 255 | 150 | 150 |
| AAC CF 200 | 600 | 500 | 300 | 200 | 200 |
| AAC CF 200A | 760 | 750 | 300 | 200 | 200 |

A full range of Activated Carbon is available for use with the CF range of Carbon Canisters.

AAC CF range - Carbon Canisters

Technical Specifications

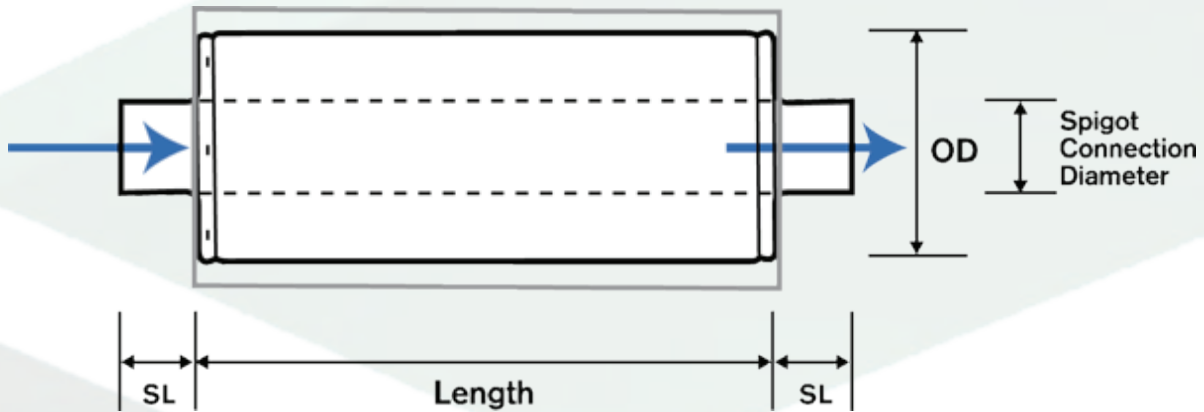

Complete In-Line Cylinder Filter For Ductwork Connection At Both Ends

| Model No. | Maximum Volume Flow Rate (cubic m/hr) | Length (mm) | Outer Diameter (mm) | Spigot Connection Diameter OD (mm) | SL |
|----------------|---------------------------------------|-------------|---------------------|------------------------------------|----|
| AAC IL CF 100 | 160 | 475 | 180 | 98 | 50 |
| AAC IL CF 125 | 240 | 475 | 255 | 148 | 50 |
| AAC IL CF 150 | 420 | 475 | 300 | 148 | 50 |
| AAC IL CF 200 | 600 | 525 | 375 | 198 | 50 |
| AAC IL CF 200A | 760 | 775 | 375 | 198 | 50 |

The in-line cylinders enable the cylindrical Filters to be installed into in-line ductwork, enabling a streamlined installation for a cylindrical Carbon Filter to be installed. The upper cylinder can be removed from its outer casing to enable Media Replacement to be carried out by removal of self-tapping screws.

The outer cylinder casings are manufactured in either galvanised mild steel, 304/316 stainless steel or powder coated mild steel as required.